

Capsule Summary 11 Shipwright Street
AA-29

Located on the secluded residential Shipwright Street, 11 Shipwright Street was the second dwelling constructed on the western side of the street between Revell Street and Spa Creek. Taking advantage of its location along Spa Creek, various owners of the large parcel successfully established the Annapolis Boat Club and Claude and Co's Chesapeake Bay Oyster House. The property provides insight into the development of the secluded street, which was originally part of a larger tract of land that was subdivided by Dennis Claude, Jr. shortly before the dwelling was constructed between 1903 and 1908.¹ The property consists of a single-family residence, converted into six private apartments in the years between 1930 and 1954. Renovated back into a single-family dwelling in 1977, the Colonial Revival style house regained its original plan with contemporary additions to the rear elevation, facing Spa Creek.

The dwelling at 11 Shipwright is a two-and-a-half-story frame structure set upon a raised basement. The facade and rear elevation are clad in wood weatherboard, while the side elevations are clad in asbestos shingles. The gable roof is covered with asphalt shingles. Presently, the house is three bays wide and features a side-passage entry door. The front elevation contains a one-story open porch, while the rear elevation is finished with a two-and-a-half-story open porch and balustrade. Historically, the dwelling contained a one-story open porch on both the front and rear elevations. The eaves hang over the front facade approximately two-feet with an ovolo cornice. A corbel capped brick chimney projects from the center of the gable roof. Due to the sharp slope of the ground, the raised basement is exposed on all elevations except the facade.

¹The building does not appear on the Sanborn Maps of 1903, but does appear on the 1908 Sanborn Maps as a single-family dwelling. Deed and tax assessment records do not document the existence of the dwelling at 11 Shipwright Street prior to 1903.

MARYLAND HISTORICAL TRUST
MD INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY

Inventory No. AA-29

=====

1. Name of Property

=====

historic name 59-67 Shipwright Street

other names 11 Shipwright Street

=====

2. Location

=====

street & number 11 Shipwright Street not for publication

city or town Chevy Chase vicinity

state Maryland code county Anne Arundel code

zip code 21401

=====

3. State/Federal Agency Certification N/A

=====

4. National Park Service Certification N/A

=====

5. Classification

=====

Ownership of Property (Check all that apply)

- 1 private
 public-local
 public-State
 public-Federal

Category of Property (Check only one box)

- 1 building(s)
 district
 site
 structure
 object

Number of Resources within Property

Contributing Noncontributing

<u> 1 </u>	<u> </u>	buildings
<u> </u>	<u> </u>	sites
<u> </u>	<u> </u>	structures
<u> </u>	<u> </u>	objects
<u> 1 </u>	<u> </u>	Total

Is this property listed in the National Register?

Yes X Name of Listing Annapolis Historic District

No

Maryland Inventory of Historic Properties
Annapolis Survey
11 Shipwright Street
Anne Arundel County, Maryland

Inventory No. AA-29
(Page 2)

=====

6. Function or Use

=====

Historic Functions (Enter categories from instructions)

Cat: <u>Residential</u>	Sub: <u>Dwelling</u>
<u></u>	<u>Apartments</u>
<u></u>	<u></u>

Current Functions (Enter categories from instructions)

Cat: <u>Residential</u>	Sub: <u>Dwelling</u>
<u></u>	<u></u>
<u></u>	<u></u>

=====

7. Description

=====

Architectural Classification (Enter categories from instructions)

Colonial Revival

Materials (Enter categories from instructions)

foundation Brick

roof Asphalt Shingles

walls Asbestos Shingles

Wood Weatherboard

other

Narrative Description (Describe the historic and current condition of the property.) See Continuation Sheet No. 7-1

Maryland Inventory of Historic Properties
Annapolis Survey
11 Shipwright Street
Anne Arundel County, Maryland

Inventory No. AA-29
(Page 3)

=====

8. Statement of Significance

=====

Applicable National Register Criteria (Mark "x" in one or more boxes for the criteria qualifying the property for National Register listing)

- ☐ A Property is associated with events that have made a significant contribution to the broad patterns of our history.
- ☐ B Property is associated with the lives of persons significant in our past.
- ☒ C Property embodies the distinctive characteristics of a type, period, or method of construction or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components lack individual distinction.
- ☐ D Property has yielded, or is likely to yield information important in prehistory or history.

Criteria Considerations (Mark "X" in all the boxes that apply.)

- ☐ A owned by a religious institution or used for religious purposes.
- ☐ B removed from its original location.
- ☐ C a birthplace or a grave.
- ☐ D a cemetery.
- ☐ E a reconstructed building, object, or structure.
- ☐ F a commemorative property.
- ☐ G less than 50 years of age or achieved significance within the past 50 years.

Maryland Inventory of Historic Properties
Annapolis Survey
11 Shipwright Street
Anne Arundel County, Maryland

Inventory No. AA-29
(Page 4)

Areas of Significance (Enter categories from instructions)
Architecture

Period of Significance 1903-1908

Significant Dates 1903-1908

Significant Person (Complete if Criterion B is marked above)

Cultural Affiliation

Architect/Builder unknown

Narrative Statement of Significance (Explain the significance of the property.) See Continuation Sheet No. 8-1

Maryland Inventory of Historic Properties
Annapolis Survey
11 Shipwright Street
Anne Arundel County, Maryland

Inventory No. AA-29
(Page 5)

=====

9. Major Bibliographical References

=====

(Cite the books, articles, legal records, and other sources used in preparing this form.)

Articles, Books, Published and Unpublished Sources

Anderson, Elizabeth B. Annapolis: A Walk Through History. Centreville, MD: Tidewater Publishers, 1984.

Anne Arundel County Assessment Records. 1876-1896; 1896-1905. Maryland State Archives. Record Group C35.

Anne Arundel County Land Records. Anne Arundel County Courthouse and Maryland State Archives, Annapolis, Maryland.

The Maryland Comprehensive Historic Preservation Plan. Maryland Historical Trust. Department of Economic and Community Development, June 1986.

McIntire, Robert Harry. Annapolis Maryland Families. Baltimore: Gateway Press, Inc., 1979.

Papenfuse, Edward. "Southern Urban Society after the Revolution: Annapolis, Maryland, 1782-1786." Final Report for NEH Grant #H69-0-178, Historic Annapolis Foundation, 1969.

Record Group 29 "Records of the Bureau of the Census." 1900, 1910 and 1920 Census; Anne Arundel County, Maryland.

Maps and Drawings

Bird's Eye View of the City of Annapolis, Chas. Magnus, 1864, Reproduced, 1967.

Gray's New Map of Annapolis, Anne Arundel County, MD., 1877.

Hopkins, G.M. Map of Annapolis, 1878.

Map of Annapolis, Southern Map Company, Baltimore, MD., 1905.

Plan of Annapolis, Geo. H. Shafer, 25 July 1718.

Sanborn Fire Insurance Maps, 1885, 1891, 1896, 1897, 1903, 1908, 1913, 1921, 1930, 1954.

Photographs

Hayman Collection, 1920ca-1930ca. Record Group SC1406. Annapolis, Maryland: Maryland State Archives.

Mame Warren Collection, 1859-1910. Record Group SC985. Annapolis, Maryland: Maryland State Archives.

Maryland Inventory of Historic Properties
Annapolis Survey
11 Shipwright Street
Anne Arundel County, Maryland

Inventory No. AA-29
(Page 6)

City Directories

Mullin-Kille and Capital-Gazette City Directories of Annapolis, MD.
Ohio: Mullin-Kille; Evening Capital; and the Maryland
Gazette, 1949.

Polk's City Directories of Annapolis, MD. New York: R.L. Polk and
Co., 1928, 1954.

=====

10. Geographical Data

=====

Acreage of Property less than 1 acre

Verbal Boundary Description (Describe the boundaries of the
property.)

The dwelling at 11 Shipwright Street occupies Parcel 1222 Tax Map
4-6 of Annapolis.

Boundary Justification (Explain why the boundaries were selected.)

Parcel 1222 has been associated with the building located at 11
Shipwright Street since its construction in the years between 1903
and 1908.

=====

11. Form Prepared By

=====

name/title Laura Trieschmann/Architectural Historian
organization Traceries date February 11, 1994
street & number 5420 Western Avenue telephone 301/656-5283
city or town Chevy Chase state MD zip code 20815

=====

12. Property Owner

=====

name Guy and Simone D. Cane
street & number 11 Shipwright Street telephone 410/268-1125
city or town Annapolis state MD zip code 21401

=====

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

Section 7 Page 1

11 Shipwright Street
name of property
Anne Arundel County, MD
county and state

=====

Located on the secluded residential Shipwright Street, 11 Shipwright Street was the second dwelling constructed on the western side of the street between Revell Street and Spa Creek. The property consists of a single-family residence, constructed between 1903 and 1908 and converted into six private apartments in the years between 1930 and 1954. Renovated back into a single-family dwelling in 1977, the Colonial Revival style house regained its original plan with contemporary additions to the rear elevation, facing Spa Creek.

The dwelling at 11 Shipwright is a two-and-a-half-story frame structure set upon a raised basement. The facade and rear elevation are clad in wood weatherboard, while the side elevations are clad in asbestos shingles. The gable roof is covered with asphalt shingles. Presently, the house is three bays wide and features a side-passage entry door. The front elevation contains a one-story open porch, while the rear elevation is finished with a two-and-a-half-story open porch and balustrade. Historically, the dwelling contained a one-story open porch on both the front and rear elevations. The eaves hang over the front facade approximately two-feet with an ovolo cornice. A corbel capped brick chimney projects from the center of the gable roof. Due to the sharp slope of the ground, the raised basement is exposed on all elevations except the facade.

The facade (northeast elevation) contains a one-story open porch, constructed of wood with tapered Tuscan columns supporting the flat roof deck. The cornice of the porch features beaded molding and dentils. The deck is surrounded with square posts and balustrade. The first story of the facade consists of a side-passage entry with two window openings. The openings, possibly originally windows, currently are doors with twelve-lights over a recessed panel. The main entrance contains a wood and glass door. The second story has three 2/2 windows with wood lintels and sills. All the windows and the two secondary entrances have projecting wood sills, ogee lintels with dentil molding, and operable louvered shutters.

The northwest elevation contains three 2/2 window openings on the first story, four openings on the second story, and one double casement opening on the third story. All the window openings, with the exception of one on the second story, have wood lintels and ovolo cornices.

The southeast elevation contains one 2/2 window opening on the first story, two openings and a small octagon window on the second

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

Section 7 Page 2

11 Shipwright Street

name of property

Anne Arundel County, MD

county and state

=====

story, and one double casement opening on the third story. The windows have the same sills and surrounds as those featured on the northwest elevation, with the exception of the aluminum octagon window. A one-story gable addition, on a brick foundation, has been constructed on the southern corner of the building. There is a single 1/1 window opening on the eastern elevation of the addition.

The rear elevation (southwest), fronting on Spa Creek, has a two-story open porch with an extended full basement. The basement story, currently under renovation, features a double entry flanked by three casement windows. The entry has plain trim with a ovolo style cornice. On the roof of the basement is an open deck surrounded by recently installed square balusters. The first story of the elevation contains a 1/1 window on the northern end and a large plate glass window flanked by two, 12-light, panelled wood entry doors. The plate glass window is surrounded by plain trim and an ovolo cornice. The second story is pierced by 2/2 windows flanking wood and glass double entry doors with side-lights.¹ A two-story addition was constructed circa 1953 on the southern end of the elevation.² The addition features a pair of plate glass windows over two awning windows on both the basement and first stories.

The interior has a side-passage, double-pile plan with additions. When the building was converted into six apartments in the mid-20th century, the main interior stair was removed. During the renovation in the late 1970s, the location of the stair was discovered and the narrow quarter-turn stair was reconstructed. The open stringer stair is ornamented with stringer brackets, gooseneck and easement railing crooks, with Colonial Revival style newel post, landing newels, and thin tapered balusters. The wall stringer and baseboards of the entrance hall are approximately seven inches in height with a ovolo style top bead. Located at the western end of the entrance hall is a small square room and a

¹The entry doors to the deck were installed recently by the present owner.

²The date of construction for the addition was provided by the present owner; however, the addition does not appear on the updated 1954 Sanborn Maps.

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

Section 7 Page 3

11 Shipwright Street

name of property

Anne Arundel County, MD

county and state

=====

contemporary bathroom.³

The spacious front and rear parlors, located to the south of the small entrance hall, are finished with thin pine wood floor, recessed panel wainscoting with quadrant beading, a plaster ceiling modillion, and contemporary scalloped crown molding with dentils. The large central chimney breast, located on the interior wall of the first floor, is adorned in the front parlor by a Classical Revival mantel with ogee and bolection molding, marble facing, and dentils. The mantel located in the rear parlor is ornamented on the center panel with a scallop motif and leaves, while the mantel of the front parlor has a fluted panel. The top floor of the southern addition is accessed through an opening of the southeastern elevation of the rear parlor. The addition is two-stories with a partial second story. The second story room contains a quarter-turn stair and a balustrade that overlooks the two-story portion of the addition.

The small central landing hall of the second floor provides access to the three bedrooms and bathroom. The large master bedroom, located at the rear of the building, facing Spa Creek, has recently exposed ceiling joists with circular-sawn marks. The ceiling at the center of the room has been elevated. The windows and five-panelled doors are surrounded by double beaded trim and bulls-eye corner blocks. The french doors, located on the southwestern wall, provided access to the deck.⁴ The smaller bedrooms, currently used as office space, are ornamented with double beaded trim, bulls-eye corner blocks, and double beaded ogee style picture molding. The five-panel wood doors have glass knobs.

The third floor or attic is accessed by a straight-flight stair with a Colonial Revival style newel post and thin tapered balusters. The balusters and landing newels surround the stair opening. The space is comprised of one room and a bathroom with closet space within the corners of the gable roof. The room is ornamented with pine floorboards with circular-sawn marks, beaded

³The present owner suggested that the square room at one time was the original winter kitchen.

⁴At the time of renovation, the current owners indicate that horse hair was discovered in the plaster and the name "Farnsworth" was found on a piece of wood in the wall.

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

Section 7 Page 4

11 Shipwright Street
name of property
Anne Arundel County, MD
county and state

=====

baseboards, and square-edged casing. The large exposed brick chimney is located at the center of the room, flanked by two recently installed sky-lights.

The basement contains several small storage rooms and the contemporary kitchen. The eastern portion of the basement features exposed brick foundation walls, square-edged casing, and exposed ceiling joists with circular-sawn marks. The kitchen contains contemporary fixtures with exposed 3"x 12" ceiling joists, thin square-edged casing, and a tile floor. An opening in the chimney breast features a large brick mantel. The basement is currently being extended to the west.

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

Section 8 Page 1

11 Shipwright Street
name of property
Anne Arundel County, MD
county and state

=====

Located 312 feet from the corner of Revell Street, 11 Shipwright Street is situated on the south side of Shipwright Street on the eastern bank of the Spa Creek. Taking advantage of its location along Spa Creek, various owners of the large parcel successfully established the Annapolis Boat Club and Claude and Co's Chesapeake Bay Oyster House. The property provides insight into the development of the secluded street, which was originally part of a larger tract of land that was subdivided by Dennis Claude, Jr. shortly before the dwelling was constructed between 1903 and 1908.⁵

The large tract of land on which 11 Shipwright Street is now located was originally part of Lot 17 on the Stoddert Map of 1718. The land has been traced back to Charles Carroll who owned the land in the early to mid-18th century and then, according to Liber NH 5, Folio 167, conveyed it to Dr. Upton Scott. The property remained under the ownership of Scott until his death in 1814 when it was inherited by his wife Elizabeth and nephew Clotworthy Bernie. No deeds of conveyance have been located to determine when or to whom Bernie sold the property. However, prior to 1871, Charles F. and Marian H. Howes owned all of Stoddert lot 16 and 17.

In 1871, the Howes conveyed the property to Dennis A. and Mary Claude. Dennis A. Claude, Jr., born about 1832, was an oyster packer in Annapolis. Claude and his wife, Mary Steele, who was born about 1827, had four children.⁶ According to the deed of conveyance, the property was used as an oyster packing establishment and for the burning of lime.⁷ The family lived in the large Queen Anne Victorian dwelling located at 85 Shipwright Street.

In 1875, Claude conveyed the property to Henry W. Rogers of Baltimore for \$7000.⁸ Rogers then leased the property to Claude

⁵The building does not appear on the Sanborn Maps of 1903, but does appear on the 1908 Sanborn Maps as a single-family dwelling. Deed and tax assessment records do not document the existence of the dwelling at 11 Shipwright Street prior to 1903.

⁶Robert Harry McIntire. Annapolis Maryland Families. (Baltimore: Gateway Press, Inc., 1979), p. 141.

⁷Liber SH 10 Folio 106

⁸Liber SH 10 Folio 106

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

Section 8 Page 2

11 Shipwright Street
name of property
Anne Arundel County, MD
county and state

=====
for \$700.00 a year.⁹ Rogers retained the title to the property until 1878 when it was sold to Sarah P. Ludlam.¹⁰ Between 1882 and 1884, the property was conveyed from Ludlam to David Stewart and back to Charles Ludlam.¹¹

In 1888, C. Stewart Ogden and John Ireland were assignees for the past due mortgage on the estate of Albert S. and Charles Ludlam. The property was purchased by Robert L. Helfenstein of New York for \$3000.00 at a public sale.¹² Helfenstein and his wife, Jessie Allen, conveyed the property in 1894 to Robert Moss.¹³ At the same time, Dennis A. Claude was released of his leased and rights to the property.¹⁴ The Tax Assessment Records for 1896 indicate that Robert Moss was charged with 3 lots, 1 frame dwelling, and 1 stable on Shipwright Street.

Robert Moss, born in May 1863, was an attorney. He served as State Senator (1892-1896), Judge of the Fifth Judicial Circuit (1917-1932), and chairman of the board of governors at St. Johns for twenty years. In 1888, Moss married Margaret Augusta Boone (Maggie), who was born in November 1867. Moss died in Catonsville, Maryland in August 1940.¹⁵

Robert Moss conveyed half of his interest in the property to his wife, Maggie in 1907. About that time, the property was subdivided and the dwelling at 11 Shipwright Street constructed. The remaining interest was conveyed to Maggie Moss in 1921.¹⁶ Stanley

⁹Liber SH 10 Folio 114

¹⁰Liber SH 20 Folio 261

¹¹Liber SH 20 Folio 261, Liber SH 23 Folio 80, and Liber 23 Folio 145.

¹²Liber SH 31 Folio 433 and 482, Liber SH 34 Folio 145

¹³Liber SH 47 Folio 166

¹⁴Liber Sh 47 Folio 165

¹⁵McIntire, p. 499.

¹⁶Liber GW 53 Folio 67 and Liber WNW 41 Folio 341

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

Section 8 Page 3

11 Shipwright Street

name of property

Anne Arundel County, MD

county and state

=====

J. Reynolds purchased all of the lot 17 from Moss.¹⁷ Two years after the sale, Stanley Reynolds deeded 11 Shipwright to his brother Nathan H. Reynolds.¹⁸ According to the City Directories for 1928-1929, 11 Shipwright Street (then known as 67 Shipwright Street) was occupied by N.H. Foster.

After the death of Nathan Reynolds, prior to 1945, Fidelity Trust Company of Baltimore was assigned the right to convey the property.¹⁹ In 1945, it was sold to Thomas C. and Cheslie Scott Kyle.²⁰ The City Directories for 1949 show that the dwelling was vacant. By 1951, Thomas C. Kyle sold it to John C. and Alice Ten Eyck.²¹ The updated Sanborn Maps for 1954 show that the single family dwelling was converted into six separate apartments. The City Directories for 1954 indicate that the building contained three vacant apartments and was occupied by George Schaun and Mrs. Rose Brown. (The property was then known as 59-67 Shipwright Street) Ralph Cresap Davis was assigned as Trustee for the estate following the death of John C. Ten Eyck in 1969, when special trusts were established dividing the parcel and creating boat restrictions. Just ten months after the death of her husband, Alice Ten Eyck died, deeding 11 Shipwright Street to Peter Hoyos Ten Eyck, Laura Breckinridge Ten Eyck, and Hendrix Ten Eyck.²²

In 1970, the Ten Eyck heirs conveyed the property to Albert J. Goodman, who was to reconvey it to Laura Breckinridge Ten Eyck and her husband, Wheaton B. Byers.²³ The Byers maintained the building as an apartment until 1977 when it was sold to Guy and Simone D.

¹⁷Liber FSR 21 Folio 407

¹⁸Liber FSR 67 Folio 265

¹⁹ Will Liber OBD 4 Folio 562

²⁰Liber JHH 329 Folio 61

²¹Liber JHH 629 Folio 202

²²Will Liber GMC 9 Folio 49

²³Liber 2365 Folio 421

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

Section 8 Page 4

11 Shipwright Street

name of property

Anne Arundel County, MD

county and state

=====
Cane.²⁴ The building was converted back into a single family residence at that time. The Canes renovated the building, recreating the interior stair and retaining any historic fabric. Currently, the Canes are extending the basement level on the rear elevation, facing Spa Creek.

²⁴Liber 3020 Folio 170

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

11 Shipwright Street
name of property
Anne Arundel County, MD
county and state

=====

Historic Period Theme: Architecture, Landscape Architecture &
Community Planning

Geographic Organization: Western Shore

Chronological/Developmental Period: Industrial/Urban Dominance,
1870-1930

Resource Type(s): Standing Structure

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

11 Shipwright Street
name of property
Anne Arundel County, MD
county and state

=====

Chain of Title for 11 Shipwright Street:

- 1718: Heirs of Patrick Ogleby resurveyed property on Shipwright Street.
- 1736: Daniel Davison of Charles Town, Massachusetts Bay, and his wife, Margaret, the daughter and sole heir of the Patrick Ogleby, conveyed property to Thomas Jenner of Charles Town.
Three lots in Annapolis
Liber RD 3 Folio 84
- 1745: Thomas Jenner and wife, Joannah, to Charles Carroll
Liber RB 2 Folio 148
- 1790: Charles Carroll to Dr. Upton Scott
Liber NH5 Folio 167
- 1814: Dr. Upton Scott died. His wife, Elizabeth Scott and nephew, Clotworthy Bernie of Frederick inherited
Will Liber JG 3 Folio 39
- *No deeds of conveyance have been discovered to indicate when or from whom the Howes purchased the property.
- 1871: Charles F. and Marian H. Howes to Dennis and Mary Claude
Liber SH 5 Folio 506
- 1875: Dennis Claude to Henry W. Rogers of Baltimore
Sale of property to Rogers and agreement to lease to Claude
Liber SH 10 Folio 106
- 1878: Henry W. Rogers to Sarah P. Ludlam
Liber SH 13 Folio 476
- 1882: Sarah P. Ludlam to David Stewart
Liber SH 20 Folio 261
- 1884: David Stewart to Sarah P. Ludlam
Liber SH 23 Folio 80
- 1884: Sarah P. Ludlam to Charles Ludlam
Liber SH 23 Folio 145

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

11 Shipwright Street
name of property
Anne Arundel County, MD
county and state

- =====
- 1888: C. Stewart Ogden and John Ireland, assignees for past due mortgage on the estate of Albert S. and Charles Ludlam, to Robert L. Helfenstein
Liber SH 31 Folio 433 and 482
Liber SH 34 Folio 145
- 1894: Dennis Claude to Robert Moss
Release of lease and rights
Liber SH 47 Folio 165
- 1894: Robert L. and Jessie Allen Helfenstein of New York to Robert Moss
Liber SH 47 Folio 166
- 1907: Robert Moss half interest to Maggie Moss
Liber GW 53 Folio 67
- 1921: Remaining interest
Liber WNW 41 Folio 341
- 1927: Maggie A. Moss to Stanley J. Reynolds
Liber FSR 21 Folio 407
- 1929: Stanley J. Reynolds to Nathan H. Reynolds
Liber FSR 67 Folio 265
- 1945: Fidelity Trust Company of Baltimore for Nathan H. Reynolds to Thomas C. and Cheslie Scott Kyle
Will Liber OBD 4 Folio 562
Liber JHH 329 Folio 61
- 1951: Thomas C. Kyle to John C. and Alice Ten Eyck
Liber JHH 629 Folio 202; and
Ralph Cresap Davis, Trustee to John C. and Alice Ten Eyck
Liber GTC 1003 Folio 549
- 1969: Alice Ten Eyck to C. Osborne Duvall, Trustee
Special Trust, dividing parcel
Liber 2311 Folio 436
- 1969: C. Osborne Duvall, Trustee to Alice Ten Eyck
Liber MSH 2311 Folio 440
- 1969: Alice Ten Eyck willed to Peter Hoyos Ten Eyck, Hendrix Ten Eyck and Laura Breckinridge Ten Eyck
Will Liber GMN 9 Folio 49

MARYLAND INVENTORY OF HISTORIC PROPERTIES
ANNAPOLIS SURVEY
CONTINUATION SHEET

Inventory No. AA-29

11 Shipwright Street


name of property

Anne Arundel County, MD

county and state


=====


- 1970: Albert J. Goodman, Trustee for Peter Hoyos Ten Eyck,
 Hendrix Ten Eyck and Laura Breckinridge Ten Eyck to
 Wheaton B. Byers and Laura Breckinridge Ten Eyck Byers
 Liber 2365 Folio 421
- 1977: Wheaton B. Byers and Laura Breckinridge Ten Eyck Byers to
 Guy and Simone D. Cane.
 Liber 3020 Folio 170

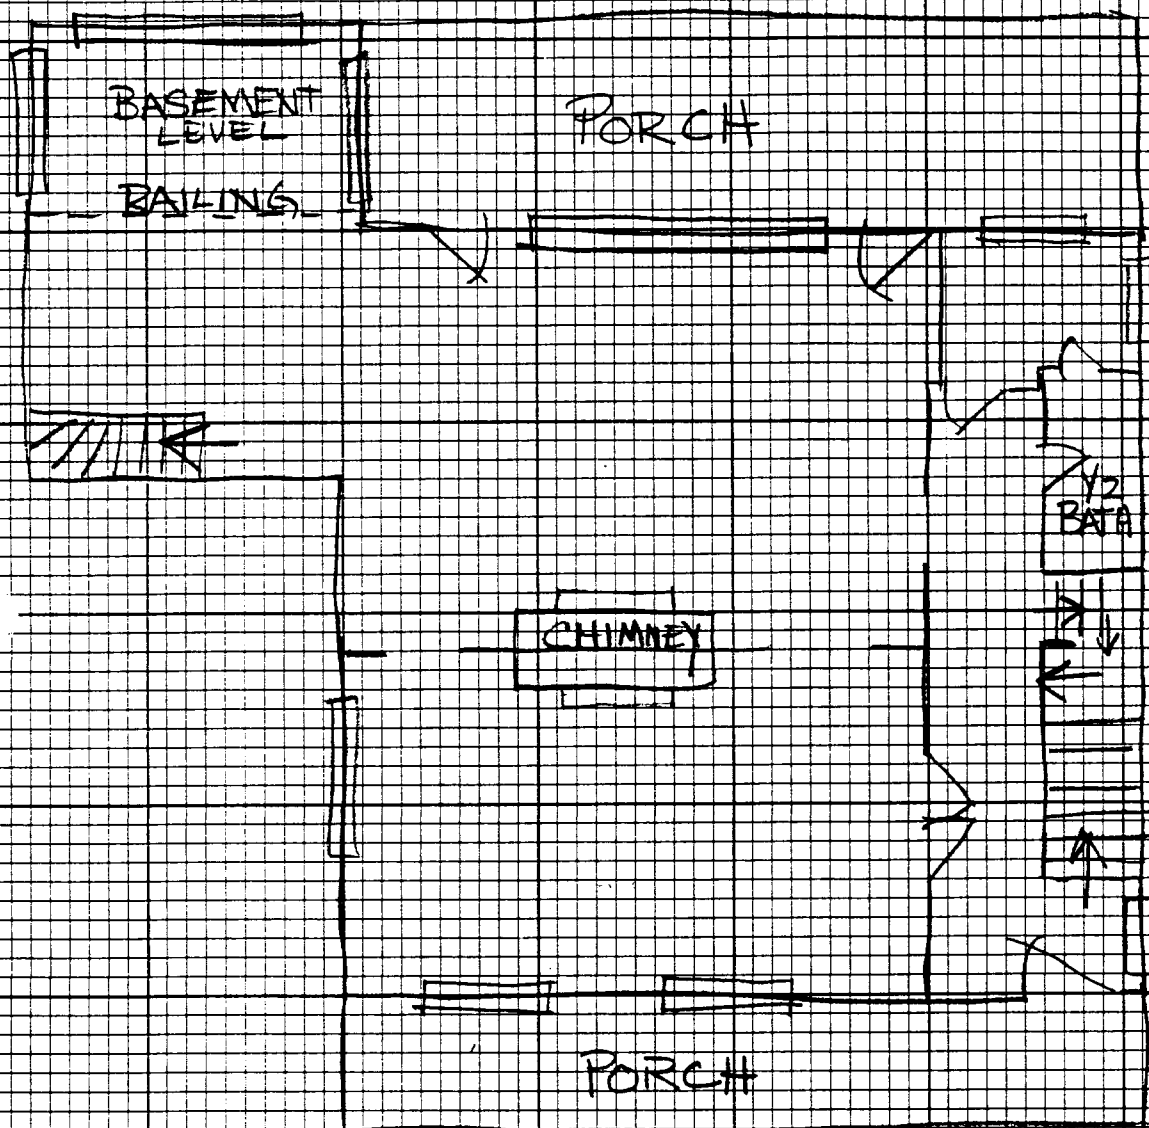

1ST FLOOR

11 SHIPWRIGHT ST.




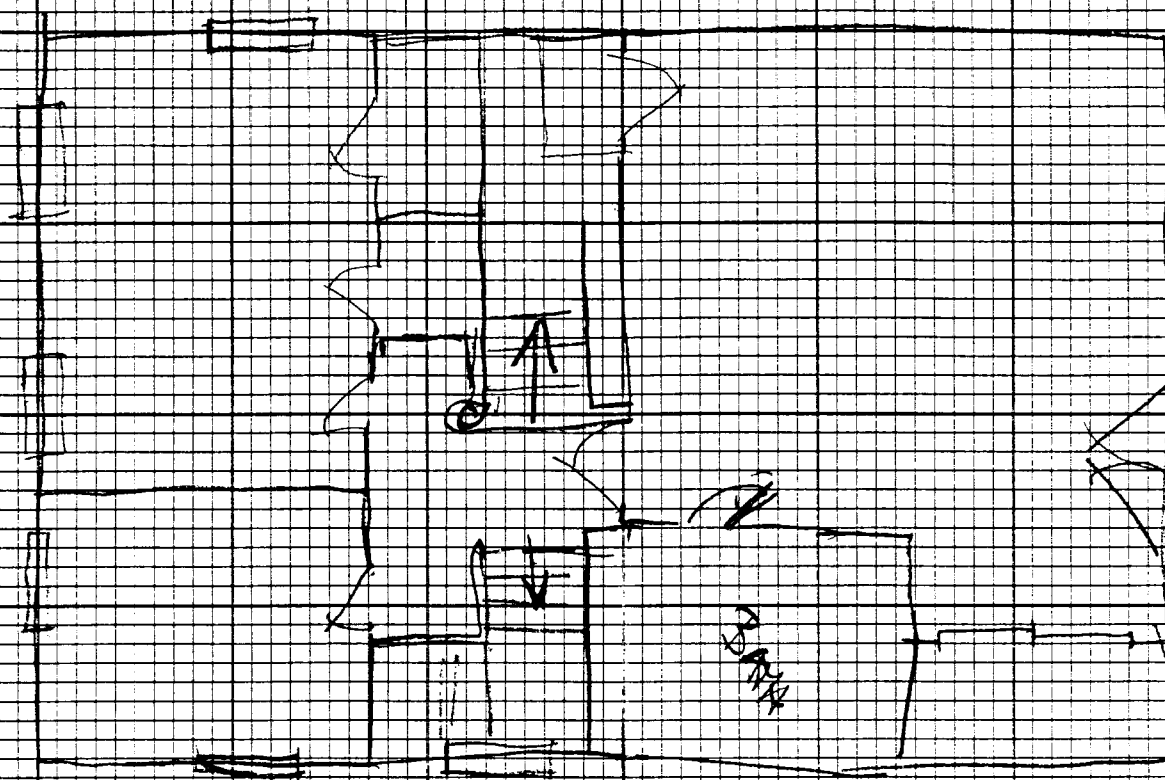


was lower


2ND FLOOR


11 SHIPWRIGHT ST



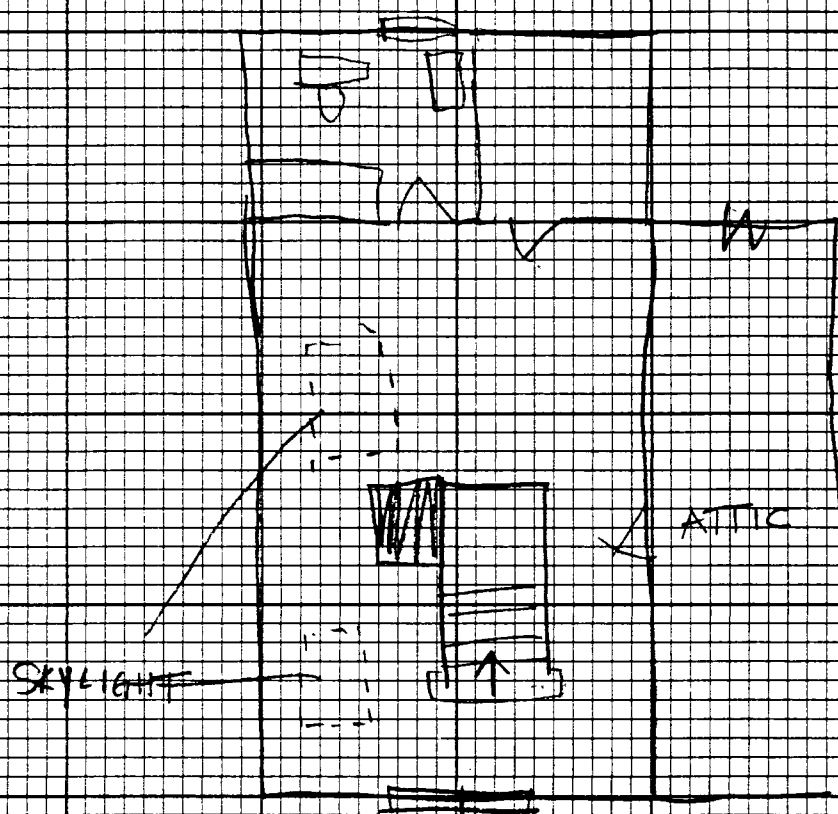

ATTIC / 3RD FLOOR
 11 SHIPWRIGHT ST



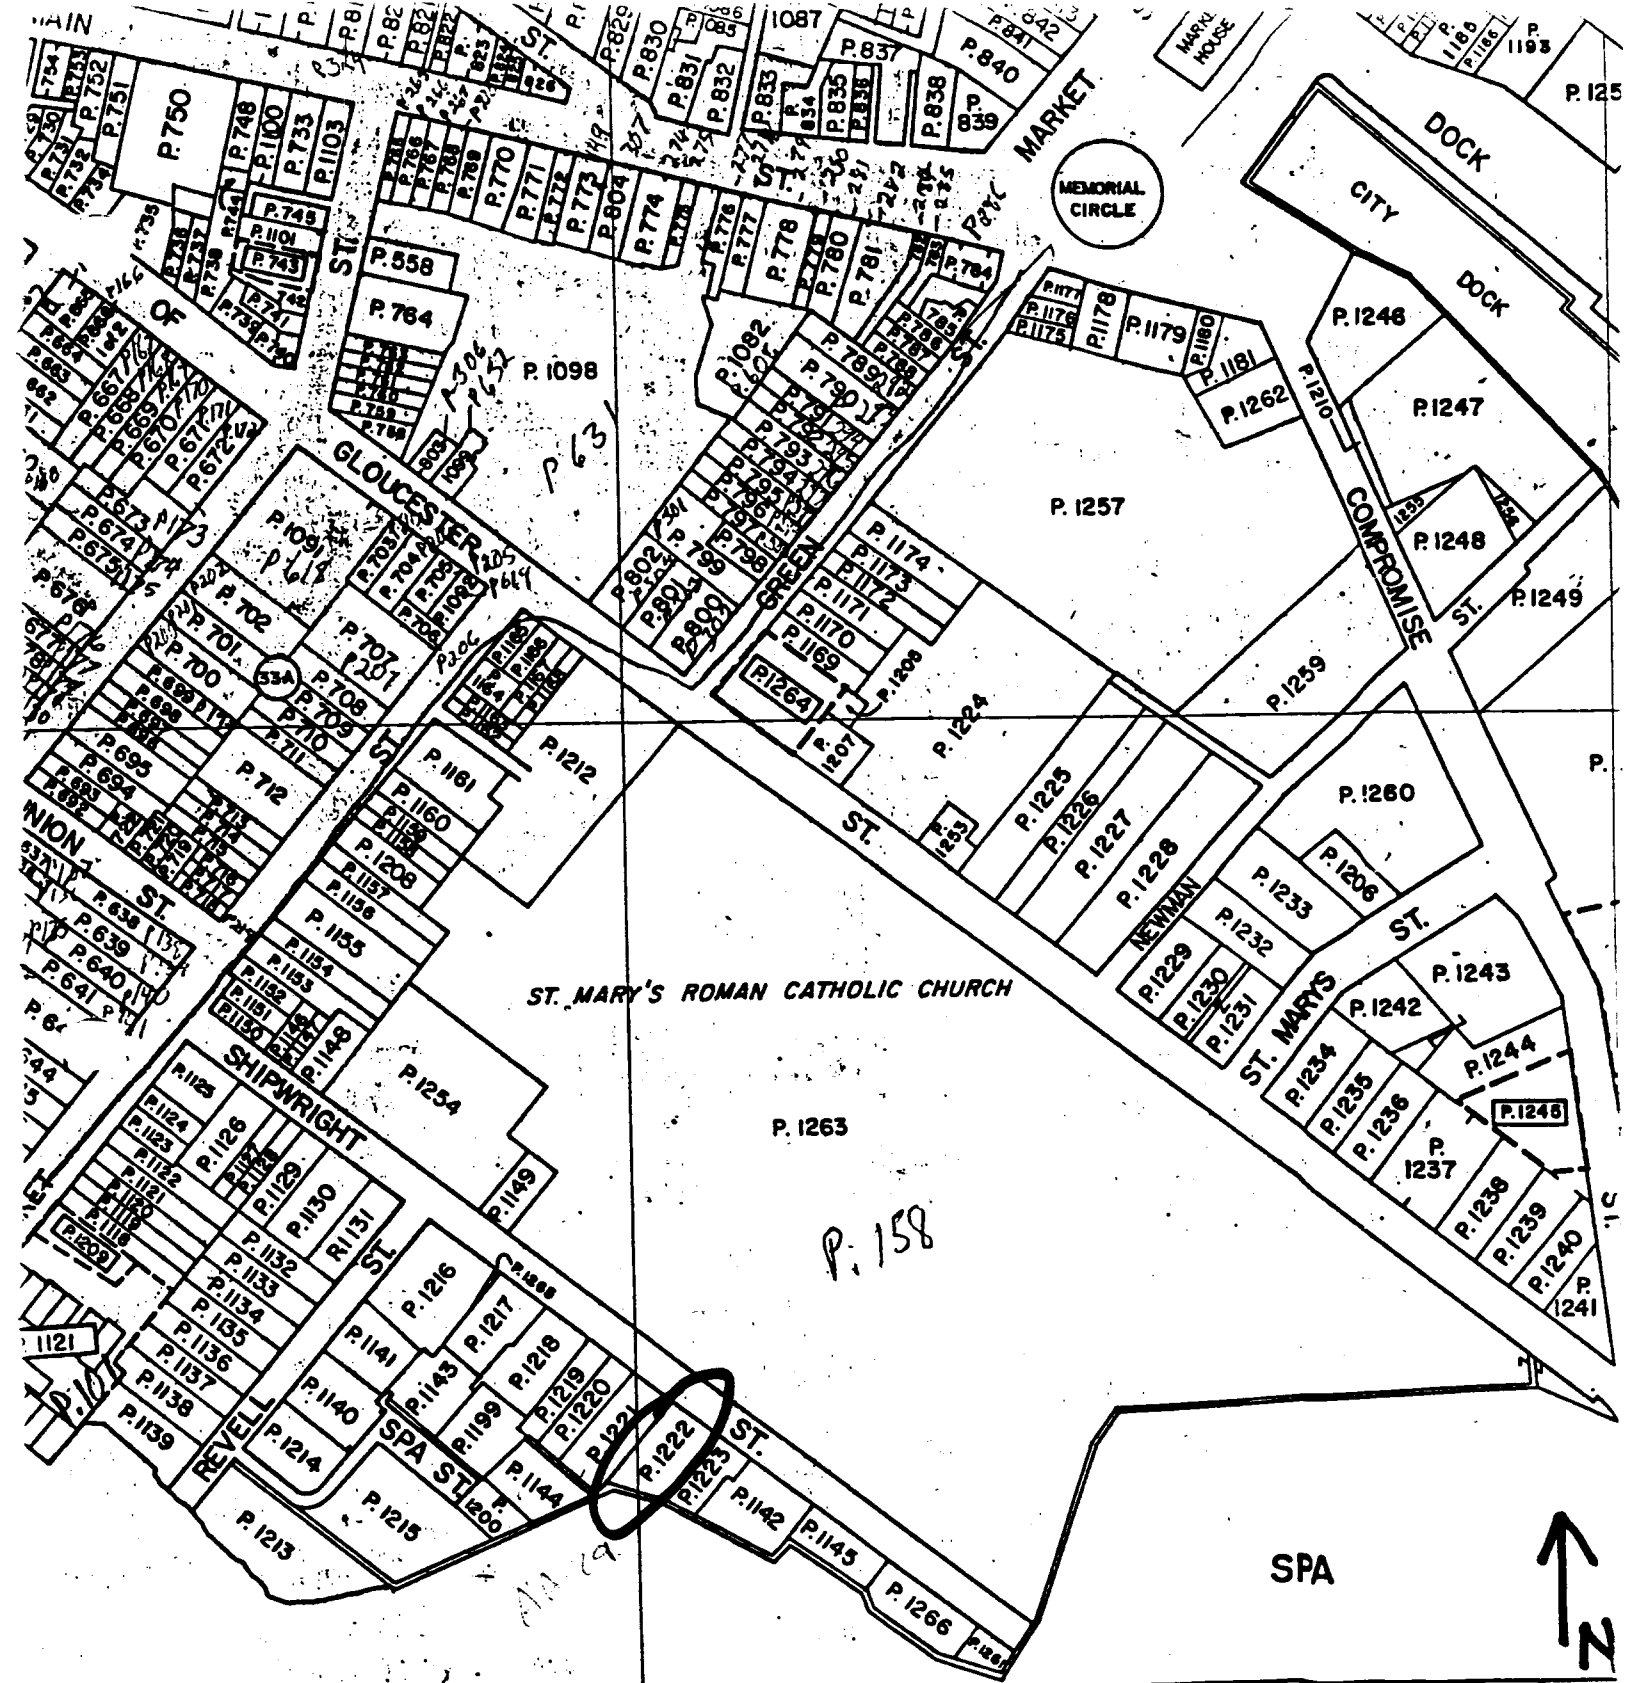

COMPILED BY
INSTRUMENTS & TAXATION
MAP DIVISION

WHEREON HAS BEEN COMPILED
THIS IS NOT AN ACTUAL
REPRESENTATION OF THE
ORIGINAL FOR LEGAL DESCRIPTION
OR FOR PURPOSES TO NOTIFY THE

PROPERTY LINE
SUB-DIVISION BOUNDARY
CONTINUING OWNERSHIP — Z I.E. — Z — Z — Z — Z —
PARCEL NUMBER — P. 349 (ASSIGNED TO IDENTIFY OWNERSHIP.)

SCALE: 1" = 200'

Tax Map of Annapolis, Maryland
Map 4-6

DATE	LIBER	BY	LAST P. NO.	AERIAL
1991				



AA 29 ANN



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

FACADE & NORTH CORNER VIEW LOOKING SOUTH
1 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND
TRACERIES

FEBRUARY 1994
MARYLAND SHPO

FACADE 1ST STORY VIEW LOOKING SOUTHEAST

2 OF 24



34.

AA-29

11 SHIPWRIGHT ST

ANNAPOLIS

TRACERIES

MARCH 1994

MARYLAND SHPO

FACADE, 1ST STORY DETAIL

3 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND
TRACERIES

FEBRUARY 1994

MARYLAND SHPO

FACADE, 2ND STORY DETAIL

4 OF 24



AA-29

11 SHIPWRIGHT STREET

ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

SOUTHEAST ELEVATION VIEW LOOKING
WEST

5 OF 24



AA-29

11 SHIPWRIGHT STREET

ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

SOUTHEAST ELEVATION & ADDITION VIEW
LOOKING SOUTHWEST

6 OF 24



AA-29
11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND
TRACERIES
FEBRUARY 1994
MARYLAND SHPO
NORTH CORNER & NORTHWEST ELEVATION.
VIEW LOOKING SOUTH
7 OF 24



2

AA-29
11 SHIPWRIGHT ST
ANNAPOLIS
TRALERIES
MARCH 1994
MARYLAND SHPO
FOUNDATION, N ELEVATION
8 OF 24



AA-29
11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND
TRACERIES

FEBRUARY 1994
MARYLAND SHPO

SOUTHWEST ELEVATION, VIEW LOOKING NORTHEAST

9 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

1ST FLOOR MAIN HALL & STAIR

10 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND
TRACERIES

FEBRUARY 1994
MARYLAND SHPO

1ST FLOOR FRONT PARLOR VIEW LOOKING NORTHEAST

11 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

1ST FLOOR FRONT PARLOR VIEW LOOKING SOUTHWEST

12 OF 24



AA-29

11 SHIPWRIGHT STREET

ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

1ST FLOOR FRONT PARLOR-MANTLE & CHIMNEY BREAST VIEW
LOOKING SOUTH

13 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND
TRACERIES

FEBRUARY 1994
MARYLAND SHPO

1ST FLOOR REAR PARLOR VIEW LOOKING SOUTH

14 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

1ST FLOOR REAR PARLOR MANTLE & CHIMNEY BREAST, VIEW
LOOKING NORTHEAST

15 OF 24



AA-29

11 SHIPWRIGHT STREET

ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

1ST FLOOR SOUTH ADDITION VIEW LOOKING SOUTH

16 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND
TRACERIES

FEBRUARY 1994
MARYLAND SHPD
2ND FLOOR CENTRAL HALL, VIEW LOOKING NORTH

17 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND
TRACERIES

FEBRUARY 1994

MARYLAND SHPO

2ND FLOOR REAR BEDROOM VIEW LOOKING SOUTH

18 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

2ND FLOOR REAR BEDROOM VIEW LOOKING WEST

19 OF 24



AA-29

11 SHIPWRIGHT STREET

ANNAPOLIS

TRALERIES

FEB 1994

MARYLAND SHPO

2ND FLOOR BEDROOM, LOOKING SOUTH

20 OF 24

2



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

3RD FLOOR/ATTIC VIEW LOOKING WEST

21 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

3RD FLOOR / ATTIC, FLOOR OF ATTIC

22 OF 24



AA-29

11 SHIPWRIGHT STREET

ANNAPOLIS, MARYLAND

TRACERIES

FEBRUARY 1994

MARYLAND SHPO

BASEMENT JOISTS CEILING

23 OF 24



AA-29

11 SHIPWRIGHT STREET
ANNAPOLIS, MARYLAND
TRACERIES

FEBRUARY 1994

MARYLAND SHPO

SOUTHWEST ELEVATION, 2ND FLOOR
DETAIL, VIEW LOOKING NORTHEAST

24 OF 24